



SELF-SERVICE SYSTEM

CAR HYGIENE PLUS

Body material

Stainless steel AISI 304 (BA)

Boiler material

Stainless steel AISI 304

(with interchangeable heating element)

Boiler volume

7,3 L

Tanks

Water: **20 L** - Det: **6 L**

Maximum output

6,7 kW

Boiler output

3,6 kW

Steam production

97 g/min | 5,9 Kg/h

Stand-by consumption

0,16 kW/h

Power supply

3~ 400V - 50/60 Hz

Steam T°

165° C

Detergent T°

90° C - 160° C

Vacuum output

3 kW

Vacuum drum capacity

30 L

Air flow

320 m3/h

Depression

3200 mm

Power cord

8 m

Weight

215 Kg

Packaging

120x80x185 cm



Available payment acceptors:

- **Banknotes**
- **Banknotes + token key**
- **Coins or tokens**

Possibility to customize the payment acceptor for the local currency
(the customer should provide the banknotes/coins for programming)

APPLICATIONS



Self-service cabinet composed of a three-phase steam generator and a turbine wet/dry vac for usage in the car wash sector, with a stainless-steel body(watertight IPX5), **unlimited steam autonomy** thanks to the automatic refilling system (electromechanical water level control system inside the boiler – True Temp™).

Equipped with an internal PLC with timer, regulation of steam/vacuum duration.

The digital display will advise the user about the necessity to proceed with the boiler maintenance.



POSSIBLE CONFIGURATIONS

STEAM+VACUUM - Standard



STAR steam/vac hose 8m
+ upholstery nozzle



JULY steam hose 8m
+ bayonette lance

with 2 functions:


- Steam + vacuum
- Steam



Detergent hose

with 2 functions:

- Steam + vacuum
- Detergent

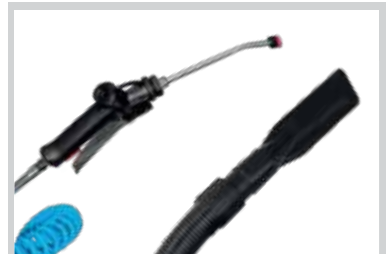

Detergent hose + vacuum hose

with 3 functions:

- Steam + vacuum
- Detergent
- Vacuum

